BUREAU ENGINEER J. James DRAFTSMAN jtc DATE 5-5-81 SCALE n/s

BUREAU Civil Design

REVISIONS			
NO.	DATE	BY	REMARKS
1	Feb. 1984	RTH	Change width from 30" to 33"
2	5-30-85	L.R.H.	REMOVED DIV. OF PUBLIC WORKS (T. BLK.)
3	7-8-87	D.H.G.	REPLACE 3000 PSI WITH CLASS 'A'
4	1-29-88	D.H.G.	REPLACED DEPARTMENT (T. BLK.)
5.	7-11-24	EBB	REVISED STANDARD NAME

cc 7/18

CONVERSIONS	
ENGLISH	METRIC

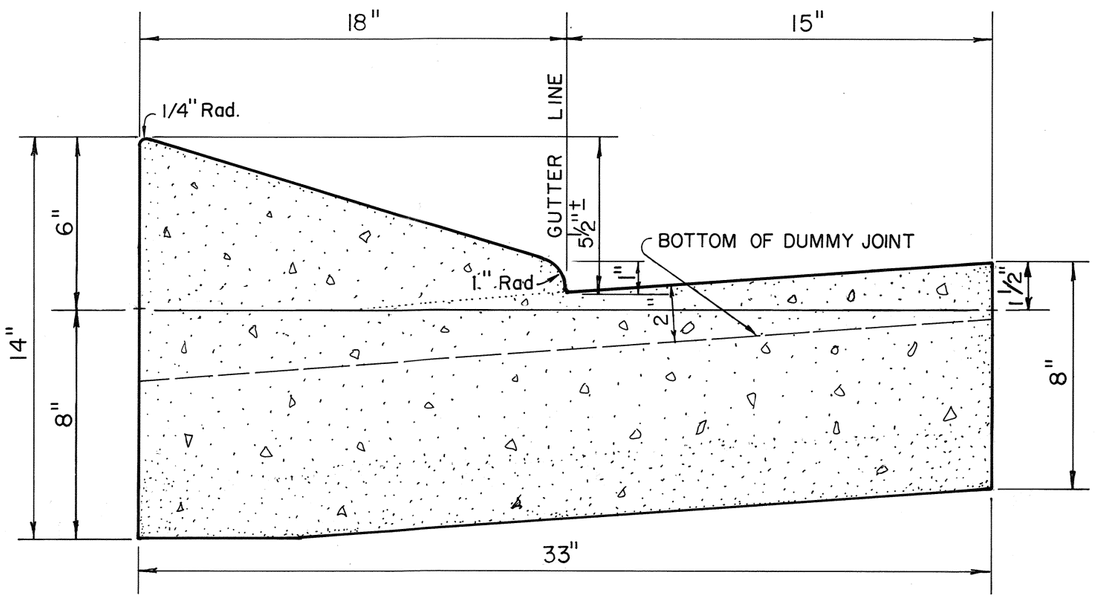

NOTES:

1. Pre-cut exp. joint material shall be used in all exp. joints.
2. Dummy joints shall be installed at 10 ft. intervals, maximum.
3. Exp. joints shall be installed at 40 ft., maximum.
4. Exp. joints shall be located at ends of radius.
5. Exp. joints shall be located a minimum of 5 ft. from inlet structure.

NOTE: Concrete to be CLASS 'A' (6 bag min.)

NOTE: STANDARD WAS FORMERLY NAMED "VALLEY GUTTER"

CITY OF MEMPHIS
DIVISION OF ENGINEERING

DESIGN STANDARD FOR MOUNTABLE CONCRETE CURB & GUTTER

Jim E. James	5-7-81
J. R. James	5-7-81
DEPUTY DIRECTOR/CIVIL ENGINEER	DATE

DWG. NO. 3

JC-5756