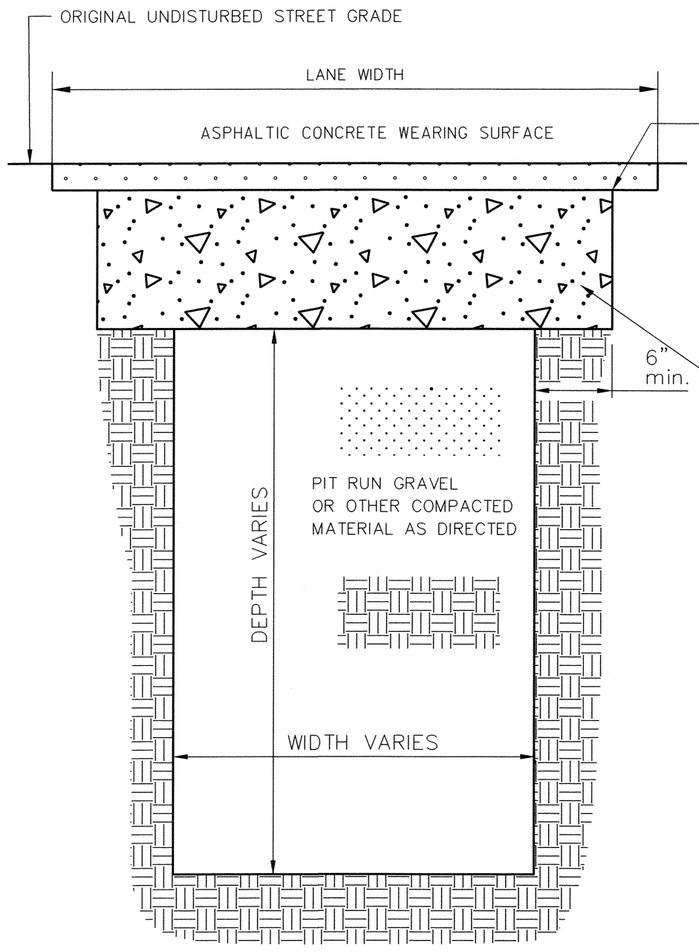

PATCH FOR ASPHALTIC CONCRETE OR SURFACE TREATED STREETS ON ALL TYPES OF BASE

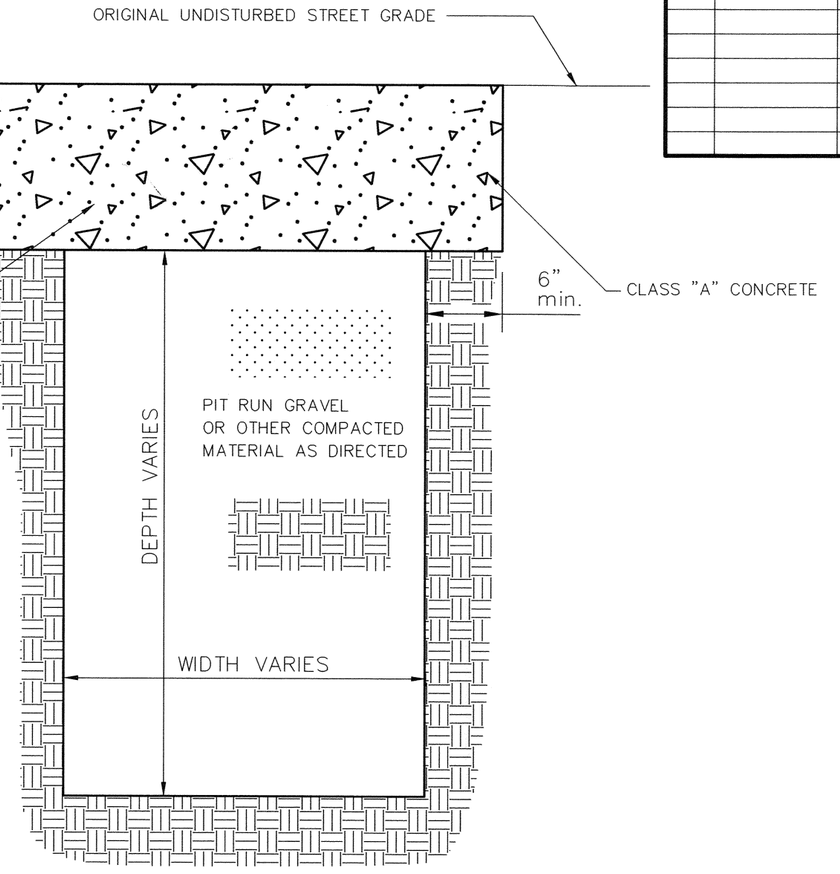

CONCRETE PATCH

"X"= $1\frac{1}{2}$" PAVEMENT THICKNESS FOR LOCAL STREETS
= 2" PAVEMENT THICKNESS FOR ARTERIAL / COLLECTOR STREETS

THIS STANDARD SUPERCEDES THE ONE LAST REVISED ON 10/15/2020

REVISIONS

NO.	DATE	BY	REMARKS

CONVERSIONS

ENGLISH	METRIC

CITY OF MEMPHIS
DIVISION OF ENGINEERING

DESIGN STANDARD
FOR
TYPICAL REPAIR OF UTILITY CUTS IN PAVEMENT

Chris Shell — CITY CIVIL DESIGN ENGINEER — 9-19-24 — DATE

JWS 9/19/24 — CITY ENGINEER — DATE

DWG. NO. 32